


Daikin Split Range

Wall, floor and ceiling mounted indoor models

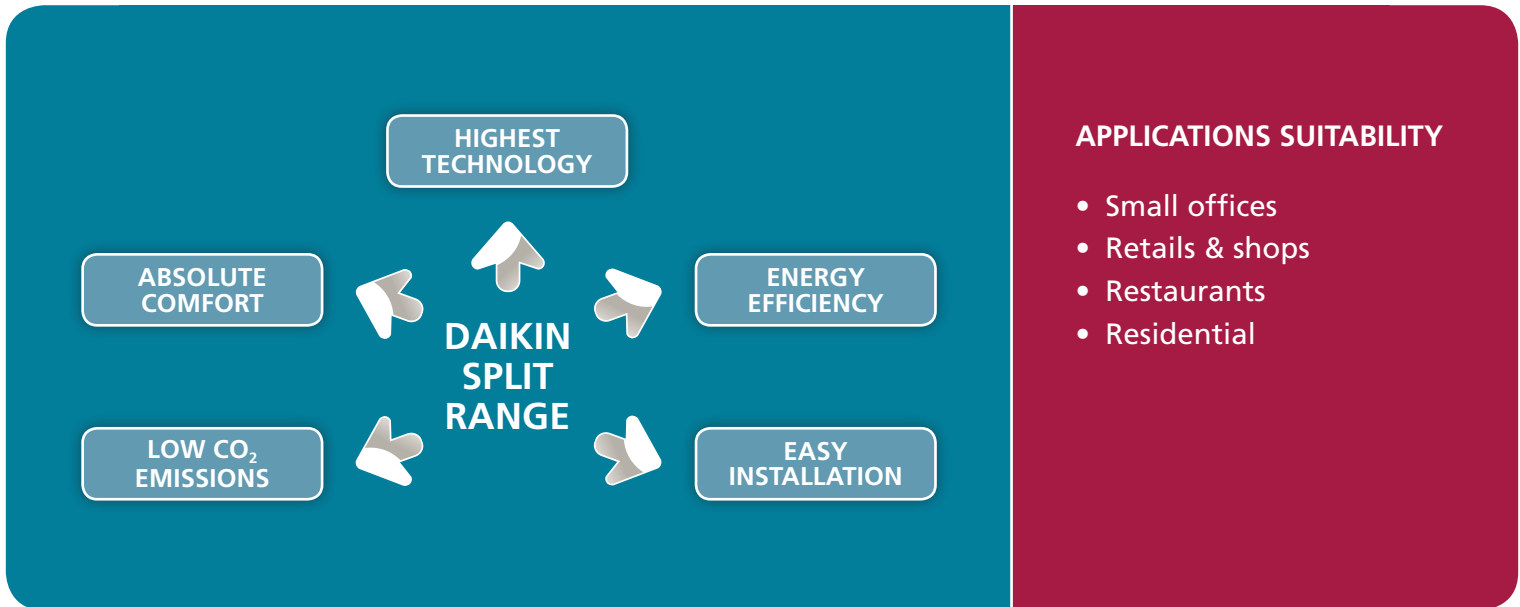

APPLICATIONS SUITABILITY

- Small offices
- Retails & shops
- Restaurants
- Residential

Daikin Split units are easy to install, easy to use, ultra reliable, have low noise levels and come in an elegant and up to date range of wall, floor and ceiling mounted indoor models.

Energy efficiency


Daikin has further improved the energy efficiency achieving an industrial top class EER of 5.00 and COP of 5.14.

Weekly timer on infrared controller

Provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 4 different actions per day possible.

Comfort mode

Guarantees draught free operation. When it cools, the flap is positioned horizontally to prevent cold air flow from being blown directly onto the body. When it heats, the flap turns vertically to take the warm air to the bottom of the room.

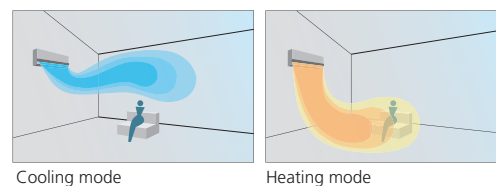


Movement sensor

The system detects people in the room by a human motion sensor (Intelligent Eye). If the room is unoccupied for more than 20 minutes, the system switches to energy efficient mode. If people return to the room, the original settings are restored.

MAIN FEATURES

Inverter control

Cuts start up time and energy consumption by almost a third, alters unit output to suit outdoor conditions, improves performance relative to power input, ensures a more even room temperature and eliminates power surges and stop/start cycles.

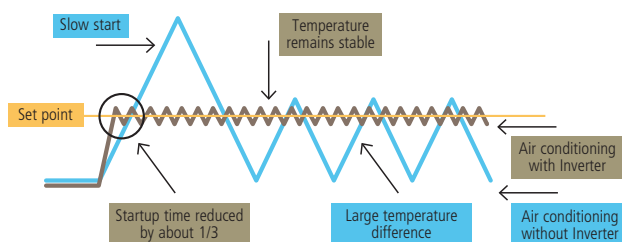

Wide operating range

- Cooling mode MIN Temperature down to -10°C
- Heating mode MIN Temperature down to -15°C

PRODUCT RANGE	Heat Pump	Cooling Only	2.0kW	2.5kW	2.8kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW	Multi Combination
INVERTER WALL MOUNTED											
Ururu Sarara	•				•		•	•			
Emura	•			•		•	•	•			•
G-Series	•	•	•	•		•	•	•	•	•	•
GV-Series	•		•	•		•	•	•	•	•	
INVERTER FLEXI	•	•		•		•	•	•	•		•
INVERTER FLOOR STANDING	•	•		•		•	•	•	•		•
INVERTER DUCTED	•	•		•		•	•	•	•		•

MODELS TO LOOK FOR...



URURU SARARA – Total air quality control

A unique combination of humidification, dehumidification, ventilation and air purification.

FLOOR STANDING unit

Wide air flow coverage in both upward and downward directions allowing even air distribution. Can be installed hanging low on the wall and standing on the floor or can be built in partly without any loss in capacity.



200mm



Daikin EMURA. The latest in design excellence

A remarkable blend of iconic design and engineering excellence. Ultra-thin profile and elegant finish in matt crystal white or sandblasted aluminium. High levels of performance.

SLIM DUCTED unit

Slim design for flexible installation. Compact dimensions, it fits flush into a narrow ceiling void due to 200mm height.

www.daikin.co.uk

Daikin products are distributed by:



Daikin units comply with the European regulations that guarantee the safety of the product.



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FC); the certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units.

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

